



RadiField® RI Test Bundle

Compact

Efficient

Full Compliant



raditeq.com

Publish date: 21 - juli - 2021

em
Service

EMC SOLUTIONS
www.emv-service.com



RadiField® RI Test Bundle

800 MHz to 6 GHz Radiated Immunity Test System

Turnkey

Efficient

Full Compliant

Raditeq offers the RadiField® RI Test Bundle for radiated immunity testing up to 6 GHz. This bundle offers a great opportunity for EMC test facilities to have a complete turnkey system which has all the advantages of the Raditeq product synergy.

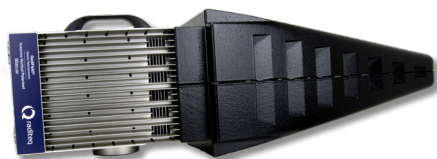
The RadiField® bundle includes:

- **RadiCentre® Pro - CTR1009B#020** - 7 slots multifunctional EMC test system
- **RadiField® - RFS2006B** - RadiField 0.8 - 6GHz @ 10 V/m field generator
- **RadiTower® - RTW2000A** - Mast with automatic H/V positioner
- **RadiGen® - RGN2006B** - 4kHz to 6GHz signal generator
- **RadiSense® - RSS2010S** - 20MHz to 10GHz Field probe
- **RadiSwitch® - RSW1022S** - Coaxial switch card (2x SPDT SMA)
- **RadiMation® Pro Software** - Full package EMC test software
- **Complete set of test accessories** - 10m RF coax cable, Radifield transport case and ISO17025 calibration for RadiSense® 10 probe, 10m fibre optic extension cable



RadiCentre® CTR1009B#020**Performance**

Number of slots for Plug-in Cards	7
Display (TFT touch screen)	7" TFT / WVGA (800x480)
Backplane	Intelligent versatile backplane
Dimensions	19" wide - 3U, 132mm (h) x 312mm (d)
Weight	7 kg
Operating System	Linux
Interfaces	USB, LAN, GPIB-488

RadiField® RFS2006B**Performance**

Frequency range	0.8 GHz – 6 GHz
Three Meter Equivalent (TME) Field(1)	10 V/m
Input connector	N-type
Max. input power to reach TME Field(1)	0 dBm
Weight	11 kg
Number of internal power meters	2 (forward + reflected)
Directional coupler	integrated

1) Three Meter Equivalent (TME) Field: 1.5 m x 1.5m Homogeneous field @ 3 m and 2 dB field compression according to IEC 61000-4-3

RadiGen RGN2006B**Performance**

Frequency range	4 kHz – 6 GHz
Output level range	-70 dBm to +13 dBm
Output level settling time	< 1 msec
Output connector	sma
Modulation types	CW, AM, FM, Pulse and Gated Pulse
Frequency error	±1 ppm/year
Frequency resolution	1 Hz

RadiSense® RSS2010S**Performance**

Frequency range	20 MHz – 10 GHz
Measuring range	0.1 V/m to 750 V/m
Maximum input level	1500 V/m
Frequency response	± 1 dB
Linearity	± 0.5 dB +/- 0.5 V/m
Isotropic deviation	< ± 0.25 dB @ 1 GHz
Electrical measuring volume	117 cm ³

RadiTower RTW2000A**Performance**

Mast height	2 meter
Type	Non reflective
Height adjustment	manual
Antenna polarisation	Automatic H/V
H/V control	Through RadiField supply card



EMC SOLUTIONS

www.emv-service.com



emv Service GmbH

Ohmstr. 11
83607 Holzkirchen
Germany

+49 8024 470 08-0
info@emv-service.com
www.emv-service.com